


4100 / 4200 / 5100

profile




4100
405 gr/m


bending

radius
R 15 *) (1015)
R 20 (1015)
R 30 (1015)
R >80 (1018)

filler position



profile




5100
522 gr/m

bending


radius
R 15 *) (1015)
R 25 (1015)
R >100 (1018)

filler position



L-shaped fillers
only for cord operated systems


*) Bending: Minimum radius 15 cm. Larger radius (20, 25, 30 cm) strongly recommended for smoother curtain movement in bends.



4200
274 gr/m

radius
R 15 *) (1015)
R 25 (1015)
R >100 (1018)

filler position




*) Bending: Minimum radius 10 cm. Larger radius (15 cm) strongly recommended for smoother curtain movement in bends.


Mounting

ceiling and wall mounting


4100, 4200 & 5100

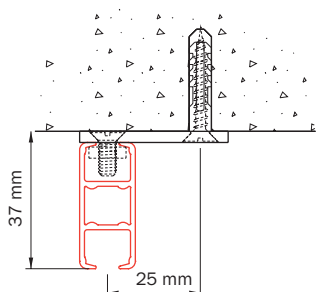


ceiling mounting 4100
with ceiling bracket 4135

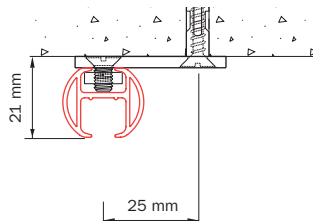


ceiling mounting 4200
with ceiling bracket 5153




ceiling mounting 5100
with ceiling bracket 5135

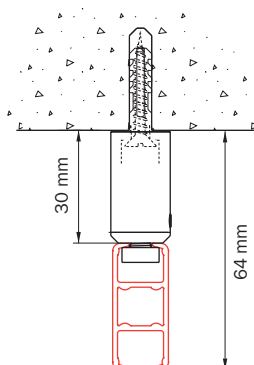

ceiling mounting 4100 with
suspension hanger 4254

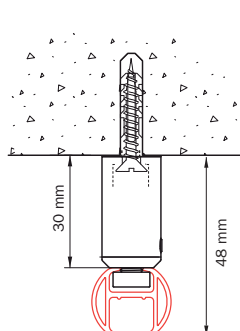


ceiling mounting 4200 with
suspension hanger 4254

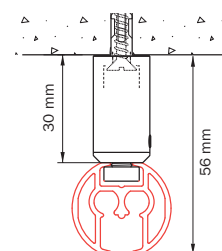


ceiling mounting 5100 with
suspension hanger 4254

Mounting


ceiling and wall mounting

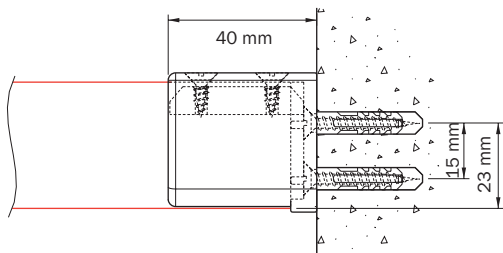


wall mounting 4100 with wall bracket 4149

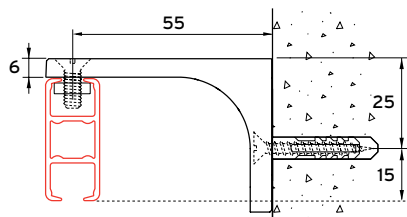


wall mounting 4100 with wall bracket 4140

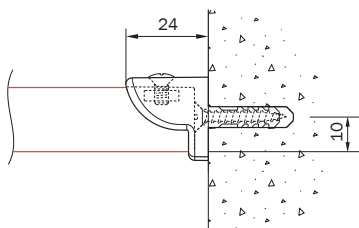


wall mounting 4200 with wall bracket 24249

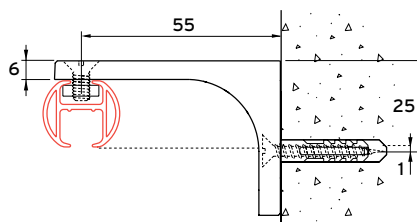

wall mounting 4200 with wall bracket 5140

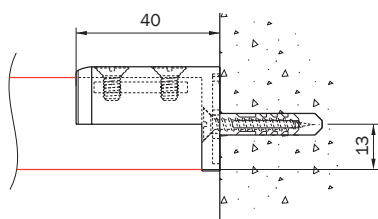


wall mounting 5100 with wall bracket 5149

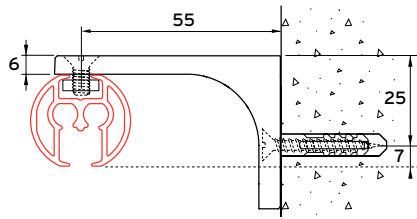


wall mounting 5100 with wall bracket 5140

Suspension hangers

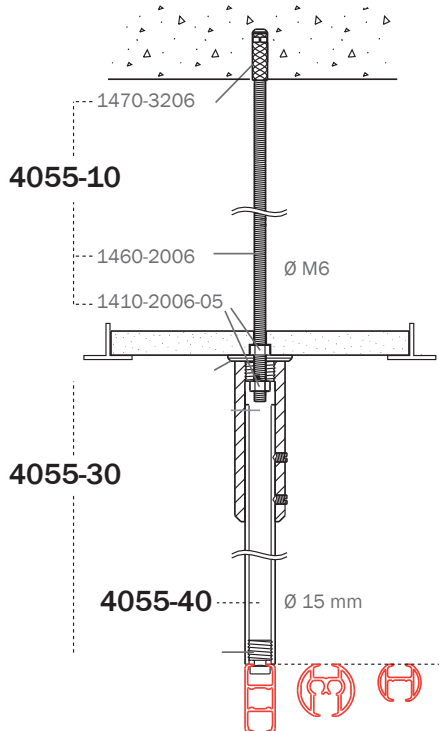


- ceiling mounting 4100, 5100 or 4200:
threaded rod set 4055-10, suspension hanger tube 4055-40 and with mounting set 4055-30.

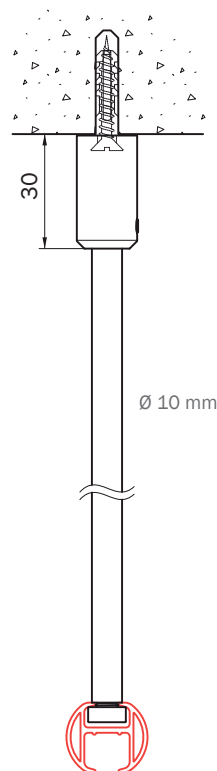


ceiling mounting with 4255

Application examples


standard shower rail situations and suspension hanger positions




L-shaped (shower)




U-shaped (shower)



special (for example corner baths)

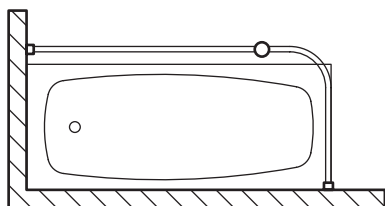


L-shaped (bath)

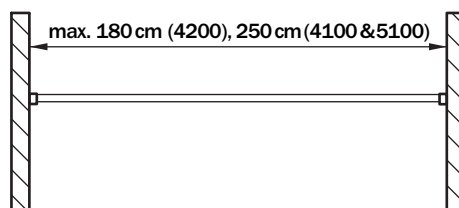


straight rail


perpendicular connections in 4100 and 5100




connection bracket 4130

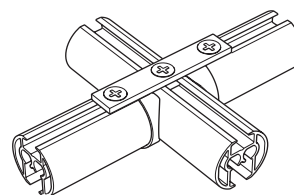

connection bracket 5130



connection bracket 4130 for T junction



connection bracket 5130 for T junction

hollow end cap 5153-20

G-standard 4100, 4200 & 5100

